

**GE current**  
a Daintree company

LED HORTICULTURE LIGHTING SYSTEMS



# Arize<sup>®</sup> Factor ML900

High power for high-density cultivators

## Optimized

Three broad light spectrums optimize growth at every stage, from vegetative to flower.

## Scalable

Maximize production in both single- and multi-layer facilities with the Factor's multiple rack mounting options

## Powerful

Each ML900 array produces an average  $1,050 \mu\text{mol}/\text{m}^2/\text{s}$  over a  $4' \times 4'$  area at  $2.8 \mu\text{mol}/\text{J}$

## Assembled in the USA

Trusted manufacturing, a standard five-year warranty and a  $>50,000$  hour lifetime ensure consistent, predictable yields for years to come

[www.led.com](http://www.led.com) for the latest in lighting innovations from the inventors of the LED




# Arize® Factor ML900

## Spectra


### Type R

High red light to optimize plant growth and photosynthesis

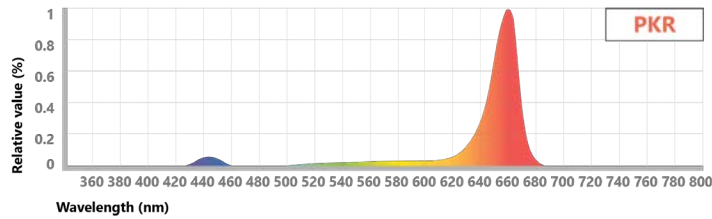


### Type B

Light that supports biomass and secondary metabolite production

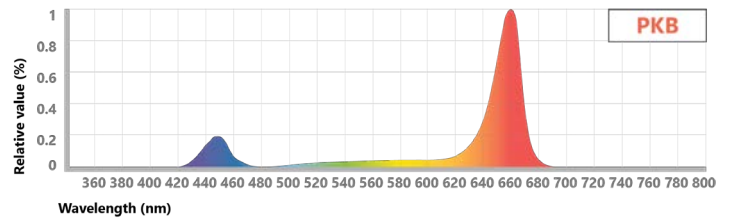

### Type F

Encourages a stretching and expansion response for more robust growth

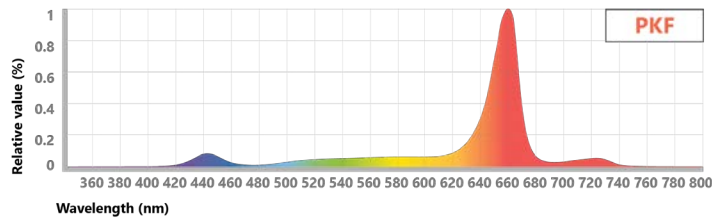


### Spectrum Photon Distribution

Ratio	Blue PF	Green PF	Red PF	Far Red PF
PKR	8.0%	15.0%	77.0%	0.0%
PKB	14.0%	16.0%	69.0%	1.0%
PKF	7.0%	16.0%	71.0%	6.0%


## Spectrum table

Spectrum	Typical photon flux <sup>1</sup> (μmol/s)	Power <sup>2</sup> (W)	Efficacy <sup>2</sup> (μmol/J)
PKR	1741	639	2.7
PKB	1695	626	2.7
PKF	1729	626	2.8

<sup>1</sup> Typical PPF +/- 10% <sup>2</sup> Tested at maximum input voltage of 480VAC

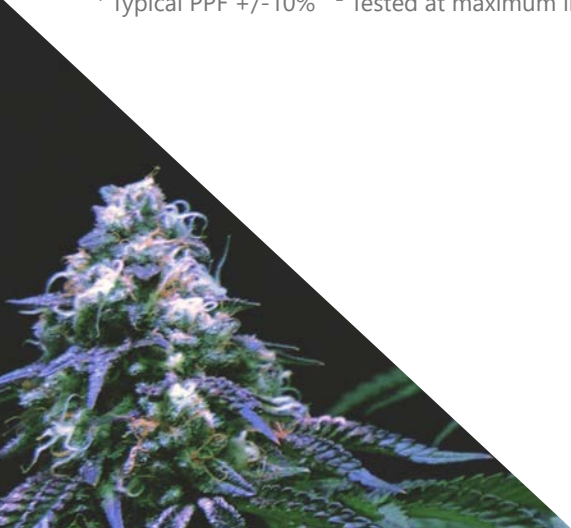


## Why Factor?

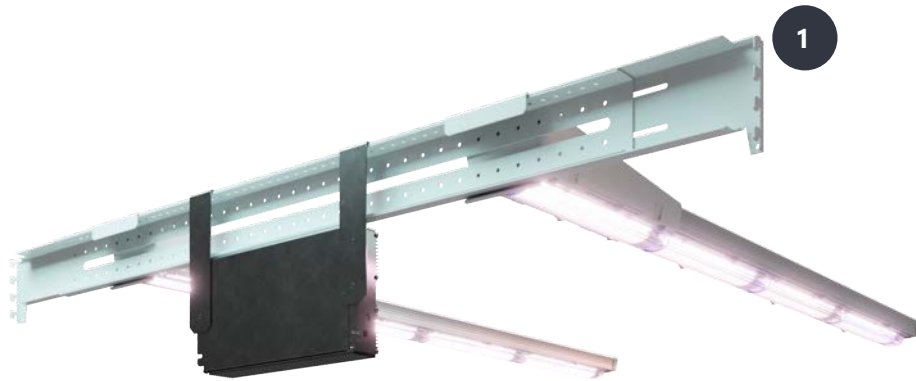

### 1 Rolling rack mount

Factor adapts to your grow, not the other way around. The system can be installed on the side of a grow cart using the transversal bar, allowing it to fit below ventilation systems.

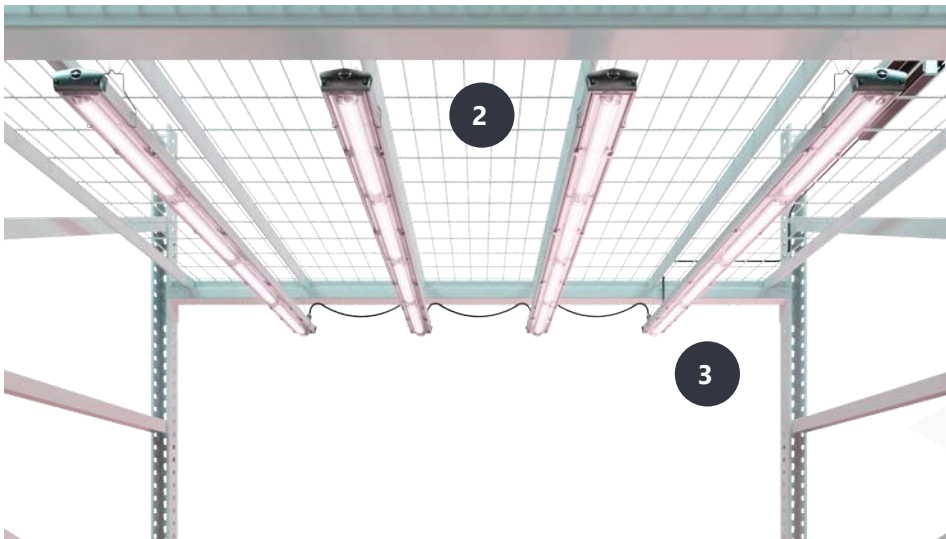

### 2 Suspended mount


One size fits all. Straightforward hooks allow the light bars to be hung from any rack, and the power supply can be remotely mounted, meaning the Factor can be used in any setup.

### 3 Reliability


We perform the most extensive, stringent testing in the industry. We test the LED, water and dust ingress protection, sub-system and complete system at our in-house and independent laboratories around the world. Validation of our designs, components, products and processes include high temperature, high humidity and accelerated life testing.

### 4 Do more with less

Compared to multi-bar arrays, the Factor maintains or exceeds PPFD levels over a 4' x 4' area using only two bars per array, lowering capital and operating expenses.

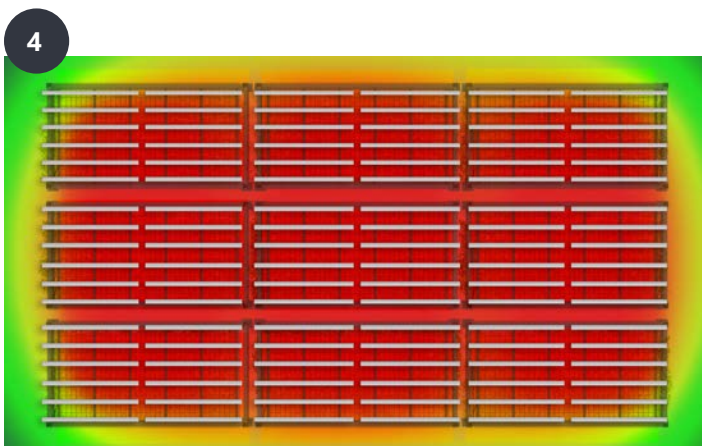



Multi-bar arrays

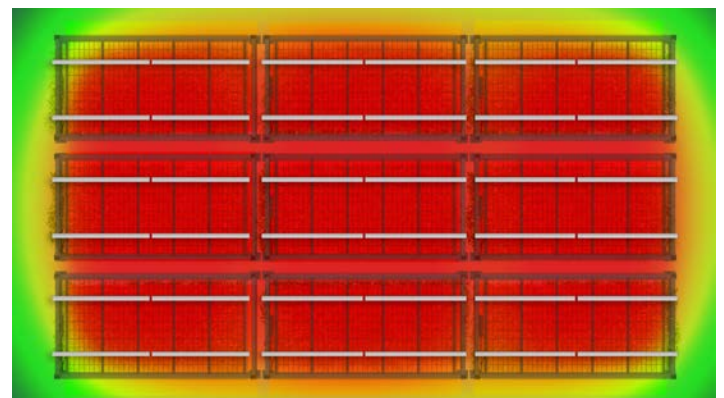

Arize Factor ML900



# Mechanical outline

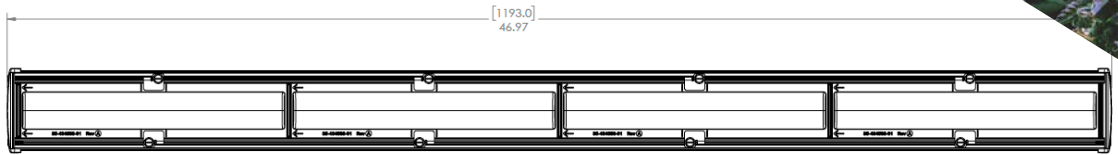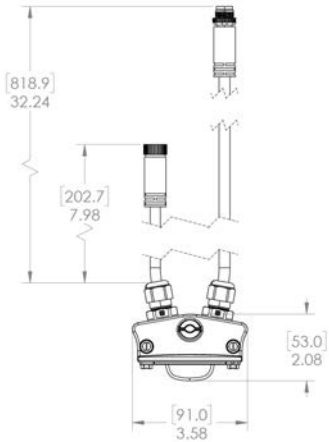

## Dimensions and weight

	Length	Width	Height	Weight
Fixture	46.97" 1193 mm	3.58" 91 mm	2.08" 53 mm	5.7 lbs 2.6 kg
Power supply	10.81" 274.5 mm	9.96" 252.9 mm	3.65" 92.8 mm	7.7 lbs 3.5 kg

# Specifications

Dimming range	0-10V	Power factor	>0.9
Max source current	450uA	Max. remote mount distance	6 ft (1.83 m)
Dim-to-off	Yes	Cooling	Passive
Dim off voltage	0.35-0.65 V (typ. 0.5 V)	Light distribution	140°
Dim on voltage	0.55-0.85 V (typ. 0.7 V)	Operating environment	0°C to 30°C (32°F to 86°F)
Dimming output range	10%-100%	IP rating	IP65
Absolute maximum dimming voltage	20V	Lifetime	L90: >50,000 hours <sup>1</sup>
For input voltage option 3, dimming control input is non-isolated from Class 1 driver output circuit. Use with sink dimmers only		Warranty	Five-year system warranty
		System certifications	cULus E492907

<sup>1</sup> Tested at 30°C per TM-21

# Order code table

Product ID	Model	Mounting	Spectrum	Input voltage	Distribution	Options	Gen
GEHF	H2 = 2x high output bars, 1x 600W driver	R = Rolling rack S = Suspended	PKR PKB PKF	2 = 120-277V (UL) 3 = 277-480V (UL)	W = Wide batwing	X = None 5 = NEMA 5-15P* 6 = NEMA 6-15P* 7 = NEMA L7-15P	1

\* Only available with input voltage option 2

© 2021 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.